


## Cable Gland - Flange - PG Thread - Nickel-Plated BRASS

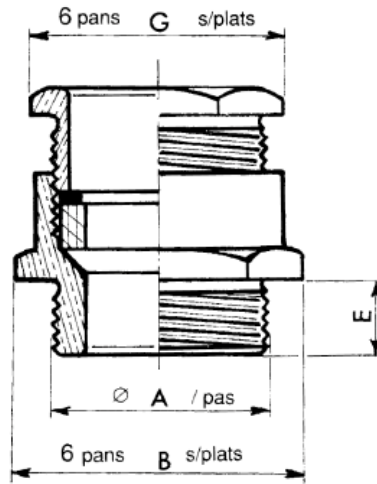

Part No.	Identification	Thread	Min. Cable Size (mm <sup>2</sup> )	Max. Cable Size (mm <sup>2</sup> )	A (mm)	B (mm)	E (mm)	G (mm)	
DEL22170	N7	PG-7	3	6	12.5 / 1.27	15	6.5	13	
DEL2217	N9	PG-9	5	9	15.5 / 1.41	17	5	16	
DEL2218	N9 long	PG-9	5	9	15.2 / 1.41	17	15	16	
DEL2219	N11	PG-11	7.5	11	18.6 / 1.41	20	6	19	
DEL2220	N11 long	PG-11	7.5	11	18.6 / 1.41	20	15	19	
DEL2221	N13	PG-13	9	13	20.4 / 1.41	22	6	20	
DEL2222	N13 long	PG-13	9	13	20.4 / 1.41	22	15	20	
DEL2223	N16	PG-16	11	16	22.2 / 1.41	24	6	22	
DEL2224	N16 long	PG-16	11	16	22.5 / 1.41	24	15	22	
DEL2225	N21	PG-21	13	19	28.3 / 1.58	30	7	28	
DEL2226	N21 long	PG-21	13	19	28.3 / 1.58	30	15	28	
DEL2227	N29	PG-29	17	25	27 / 1.58	40	8	37	
DEL2228	N29 long	PG-29	17	25	37 / 1.58	40	15	37	
DEL2229	N36	PG-36	22	33	47 / 1.58	50	8	47	
DEL2230	N36 long	PG-36	22	33	47 / 1.58	50	15	47	
DEL2231	N48	PG-48	32	44	60 / 2.30	64	8	60	
DEL2232	N48 long	PG-48	32	44	60 / 2.30	64	15	60	

Temp. Range: -40°C to 120°C

Rating: IP 66

Standards: NFC 68312