

# SCREWS, BOLTS, & THREADED ROD


SECTION

II

**Polycarbonate** is one of the toughest, most dimensionally stable thermoplastics over a wide temperature range. It has an exceptionally high impact strength and is unaffected by water below 140° F. **Polycarbonate** is unaffected by greases, oils, detergents, aliphatic hydrocarbons, most mineral acids, and the higher alcohols. It is attacked by chlorinated hydrocarbons and most aromatic solvents, ester, and ketone. **Polycarbonate** has white water transparency with a 90° light transmission. Melting Point 309 °F per ASTM D789. Underwriters Lab rating UL94V2

## PAN SLOTTED HEADSTYLE Molded in Transparent UL94V2 Polycarbonate

SCREW SIZE	A	H	J	T
4	.205-.219	.058-.068	.031-.039	.030-.040
6	.256-.270	.072-.082	.039-.048	.037-.050
8	.306-.322	.085-.096	.045-.054	.045-.058
10	.357-.373	.099-.110	.050-.060	.053-.068

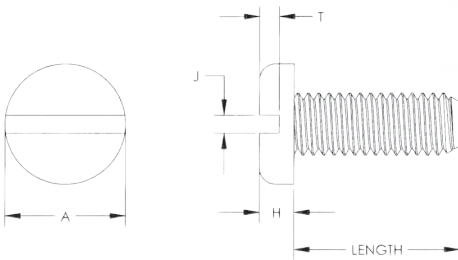


*Transparent*

PART NUMBER	SCREW SIZE	THREAD	LENGTH	MATERIAL
010440P025PC	4	440	1/4	POLYCARBONATE
010440P028PC	4	440	9/32	POLYCARBONATE
010440P037PC	4	440	3/8	POLYCARBONATE
010440P050PC	4	440	1/2	POLYCARBONATE
010632P025PC	6	632	1/4	POLYCARBONATE
010632P037PC	6	632	3/8	POLYCARBONATE
010632P050PC	6	632	1/2	POLYCARBONATE
010632P062PC	6	632	5/8	POLYCARBONATE
010632P075PC	6	632	3/4	POLYCARBONATE
010832P012PC	8	832	1/8	POLYCARBONATE
010832P025PC	8	832	1/4	POLYCARBONATE
010832P037PC	8	832	3/8	POLYCARBONATE
010832P050PC	8	832	1/2	POLYCARBONATE
010832P062PC	8	832	5/8	POLYCARBONATE
010832P075PC	8	832	3/4	POLYCARBONATE
011032P025PC	10	1032	1/4	POLYCARBONATE
011032P037PC	10	1032	3/8	POLYCARBONATE
011032P050PC	10	1032	1/2	POLYCARBONATE
011032P062PC	10	1032	5/8	POLYCARBONATE
011032P075PC	10	1032	3/4	POLYCARBONATE
011032P100PC	10	1032	1	POLYCARBONATE

## PAN PHILLIPS HEADSTYLE Molded in Transparent UL94V2

**New SIZES**

SCREW SIZE	A	H
2	.155-.167	.053-.062
4	.205-.219	.070-.080
6	.256-.270	.087-.097
8	.306-.322	.105-.115
10	.357-.373	.122-.133

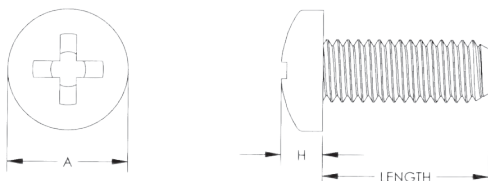

*Transparent*

PART NUMBER	SCREW SIZE	THREAD	LENGTH	MATERIAL
010256W012PC	2	256	1/8	POLYCARBONATE
010256W018PC	2	256	3/16	POLYCARBONATE
010256W025PC	2	256	1/4	POLYCARBONATE
010256W037PC	2	256	3/8	POLYCARBONATE
010256W050PC	2	256	1/2	POLYCARBONATE
010440W018PC	4	440	3/16	POLYCARBONATE
010440W025PC	4	440	1/4	POLYCARBONATE
010440W028PC	4	440	9/32	POLYCARBONATE
010440W037PC	4	440	3/8	POLYCARBONATE
010440W050PC	4	440	1/2	POLYCARBONATE
010632W025PC	6	632	1/4	POLYCARBONATE
010632W037PC	6	632	3/8	POLYCARBONATE
010632W050PC	6	632	1/2	POLYCARBONATE
010632W062PC	6	632	5/8	POLYCARBONATE
010632W075PC	6	632	3/4	POLYCARBONATE
010832W012PC	8	832	1/8	POLYCARBONATE
010832W025PC	8	832	1/4	POLYCARBONATE
010832W037PC	8	832	3/8	POLYCARBONATE
010832W050PC	8	832	1/2	POLYCARBONATE
010832W062PC	8	832	5/8	POLYCARBONATE
010832W075PC	8	832	3/4	POLYCARBONATE
011032W025PC	10	1032	1/4	POLYCARBONATE
011032W037PC	10	1032	3/8	POLYCARBONATE
011032W050PC	10	1032	1/2	POLYCARBONATE
011032W062PC	10	1032	5/8	POLYCARBONATE
011032W075PC	10	1032	3/4	POLYCARBONATE
011032W100PC	10	1032	1	POLYCARBONATE