

SCREWS, BOLTS, & THREADED ROD



SECTION

II

Polycarbonate is one of the toughest, most dimensionally stable thermoplastics over a wide temperature range. It has an exceptionally high impact strength and is unaffected by water below 140° F. **Polycarbonate** is unaffected by greases, oils, detergents, aliphatic hydrocarbons, most mineral acids, and the higher alcohols. It is attacked by chlorinated hydrocarbons and most aromatic solvents, ester, and ketone. **Polycarbonate** has white water transparency with a 90° light transmission. Melting Point 309 °F per ASTM D789. Underwriters Lab rating UL94V2

FILLISTER SLOTTED HEADSTYLE **Molded in Transparent UL94V2 Polycarbonate**



SCREW SIZE	A	H	J	T
4	.166-.183	.088-.107	.031-.039	.035-.048
6	.208-.226	.111-.132	.039-.048	.045-.060
8	.250-.270	.133-.156	.045-.054	.054-.071
10	.292-.313	.156-.180	.050-.060	.064-.083

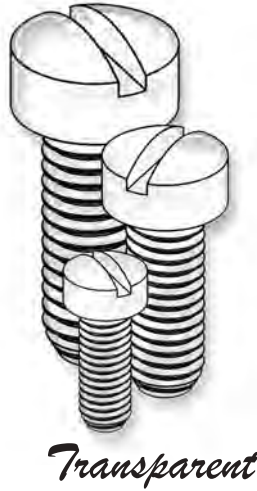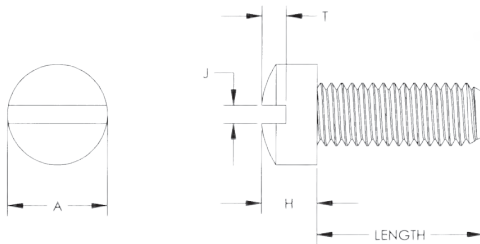

PART NUMBER	SCREW SIZE	THREAD	LENGTH	MATERIAL
010440F025PC	4	440	1/4	POLYCARBONATE
010440F028PC	4	440	9/32	POLYCARBONATE
010440F037PC	4	440	3/8	POLYCARBONATE
010440F050PC	4	440	1/2	POLYCARBONATE
010632F025PC	6	632	1/4	POLYCARBONATE
010632F037PC	6	632	3/8	POLYCARBONATE
010632F050PC	6	632	1/2	POLYCARBONATE
010632F062PC	6	632	5/8	POLYCARBONATE
010632F075PC	6	632	3/4	POLYCARBONATE
010832F012PC	8	832	1/8	POLYCARBONATE
010832F025PC	8	832	1/4	POLYCARBONATE
010832F037PC	8	832	3/8	POLYCARBONATE
010832F050PC	8	832	1/2	POLYCARBONATE
010832F062PC	8	832	5/8	POLYCARBONATE
010832F075PC	8	832	3/4	POLYCARBONATE
011032F025PC	10	1032	1/4	POLYCARBONATE
011032F037PC	10	1032	3/8	POLYCARBONATE
011032F050PC	10	1032	1/2	POLYCARBONATE
011032F062PC	10	1032	5/8	POLYCARBONATE
011032F075PC	10	1032	3/4	POLYCARBONATE
011032F100PC	10	1032	1	POLYCARBONATE

HEX SLOTTED HEADSTYLE **Molded in Transparent UL94V2 Polycarbonate**

SCREW SIZE	A	W	H	J	T
4	.181/.188	.202 MIN	.049/.060	.031/.039	.025-.036
6	.244-.250	.272 MIN	.080-.093	.039-.048	.033-.046
8	.244-.250	.272 MIN	.096-.110	.045-.054	.052-.066
10	.305-.312	.340 MIN	.105-.120	.050-.060	.057-.072

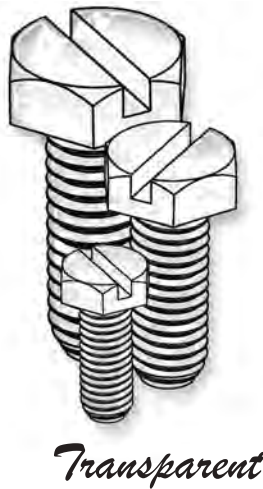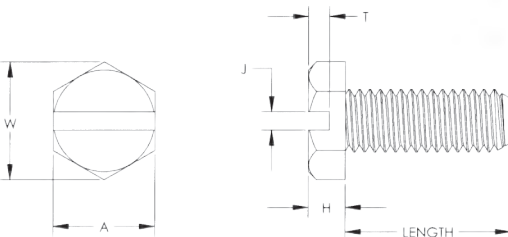

PART NUMBER	SCREW SIZE	THREAD	LENGTH	MATERIAL
010440X025PC	4	440	1/4	POLYCARBONATE
010440X028PC	4	440	9/32	POLYCARBONATE
010440X037PC	4	440	3/8	POLYCARBONATE
010440X050PC	4	440	1/2	POLYCARBONATE
010632X025PC	6	632	1/4	POLYCARBONATE
010632X037PC	6	632	3/8	POLYCARBONATE
010632X050PC	6	632	1/2	POLYCARBONATE
010632X062PC	6	632	5/8	POLYCARBONATE
010632X075PC	6	632	3/4	POLYCARBONATE
010832X012PC	8	832	1/8	POLYCARBONATE
010832X025PC	8	832	1/4	POLYCARBONATE
010832X037PC	8	832	3/8	POLYCARBONATE
010832X050PC	8	832	1/2	POLYCARBONATE
010832X062PC	8	832	5/8	POLYCARBONATE
010832X075PC	8	832	3/4	POLYCARBONATE
011032X025PC	10	1032	1/4	POLYCARBONATE
011032X037PC	10	1032	3/8	POLYCARBONATE
011032X050PC	10	1032	1/2	POLYCARBONATE
011032X062PC	10	1032	5/8	POLYCARBONATE
011032X075PC	10	1032	3/4	POLYCARBONATE
011032X100PC	10	1032	1	POLYCARBONATE