

HOSE CLAMPS AND INSTALLATION TOOLS

- APPLIANCE -

Dishwashers, laundry, refrigerators, food preparation equipment.

- ELECTRICAL/ELECTRONIC -

Positioning and placement of components and wiring.

- R.V./BOATING -

Plumbing and Accessories.


- AUTOMOTIVE -

Under hood applications, Heat-Stabilized material is available, call for details.

Micro Plastics' Standard Nylon Hose Clamps are based on the original design for this type of fastener. An overlapping tapered ring of nylon is fastened around the hose or tubing desired and secured to the required tightness by compressing interacting grooves in a ratcheting fashion, creating a tight sealing application. Clamps may be removed by separating the clamping halves in perpendicular direction at the seal.

Nylon clamps are tough, corrosion resistant and resilient.

Parts are removable and reusable.

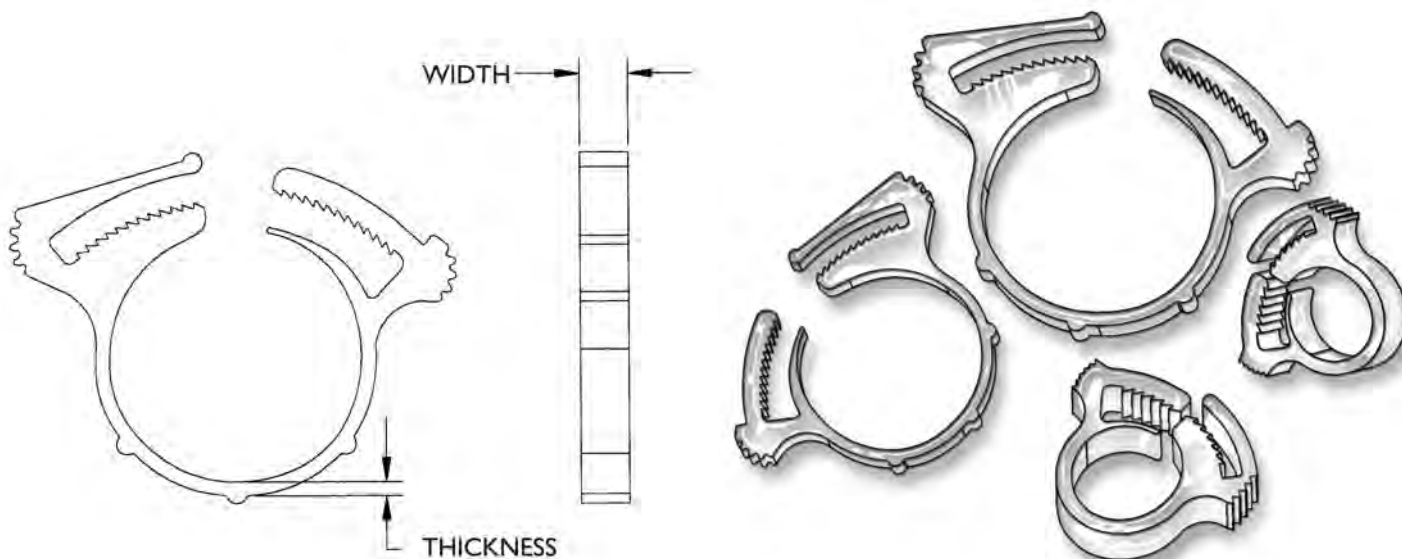

STANDARD HOSE CLAMPS

Molded in **Natural Nylon 6/6**

ITEM NUMBER	DESCRIPTION	WIDTH	THICKNESS	BUNDLE SIZE	
				MIN.	MAX.
22HSC0010	1.0 Hose Clamp	.156 (3,96)	.040 (1,02)	.235 (5,97)	.260 (6,60)
22HSC0015	1.5 Hose Clamp	.150 (3,81)	.050 (1,27)	.283 (7,19)	.312 (7,92)
22HSC0020	2 Hose Clamp	.230 (5,84)	.070 (1,78)	.350 (8,89)	.395 (10,03)
22HSC0040	4 Hose Clamp	.230 (5,84)	.070 (1,78)	.360 (9,14)	.410 (10,41)
22HSC0060	6 Hose Clamp	.230 (5,84)	.070 (1,78)	.430 (10,92)	.480 (12,19)
22HSC0080	8 Hose Clamp	.230 (5,84)	.070 (1,78)	.500 (12,70)	.545 (13,84)
22HSC0100	10 Hose Clamp	.230 (5,84)	.070 (1,78)	.525 (13,34)	.605 (15,37)
22HSC0120	12 Hose Clamp	.230 (5,84)	.070 (1,78)	.580 (14,73)	.660 (16,76)
22HSC0140	14 Hose Clamp	.230 (5,84)	.070 (1,78)	.655 (16,63)	.750 (19,05)
22HSC0180	18 Hose Clamp	.230 (5,84)	.070 (1,78)	.779 (19,79)	.899 (22,83)
22HSC0190	19 Hose Clamp	.230 (5,84)	.070 (1,78)	.859 (21,82)	.989 (25,12)
22HSC0220	22 Hose Clamp	.250 (6,35)	.070 (1,78)	.900 (22,86)	1.072 (27,23)
22HSC0240	24 Hose Clamp	.250 (6,35)	.070 (1,78)	.990 (25,15)	1.135 (28,83)
22HSC0280	28 Hose Clamp	.280 (7,11)	.070 (1,78)	1.123 (28,52)	1.296 (32,92)