



## Heyco® Nytye® Nylon Cable Tie Variations

### Push Mount

PART SPECIFICATIONS				PART NO.		DESCRIPTION	PART DIMENSIONS								HEAD STYLE
Max. Tensile Strength		Max. Bundle Diameter		Natural	Black		A Length		B Width		Max. Panel Thickness		Mounting Hole Dia.		
Lbs.	N	in.	mm.			in.	mm.	in.	mm.	in.	mm.	in.	mm.		
<b>Tension Wings</b>															
40	178	1.42	36,0	<b>3907N</b>	<b>3907</b>	PWMS-155-HSB	6.23	158	.14	3,5	.13	3,2	.187	4,7	1
50	222	1.57	40,0	<b>13254</b>	<b>13254B</b>	PMT-50-070	7.09	180	.19	4,8	.09	2,4	.187	4,7	2
		1.75	44,5	<b>3904</b>	<b>3905</b>	PMT 150	8.00	203	.19	4,8	.13	3,2	.250	6,4	1

<b>Tension Wings, Standoff, Releasable*</b>															
Spacer Height															
40	178	1.38	35,0	<b>13267</b>	<b>13267B</b>	PMST-40-066-197	6.69	170	.51	13,0	.08	2,0	.197	5,0	3
		1.25	31,8	<b>13268</b>	<b>13268B</b>	PMST-40-068-187	6.81	173	.78	19,8	.08	2,0	.187	4,7	



<b>Cupped Base, Standoff, Releasable*</b>															
30	133	1.25	31,8	<b>13273</b>	<b>13273B</b>	PMRS-30-066	6.63	168	.53	13,5	.023 - .098	0,6 - 2,5	.236 - .255	6,0 - 6,5	4

Standard color natural. Consult Heyco for UV Black (at extra charge).  
\*Width is .14" (3,6 mm)


### Other Variations

PART SPECIFICATIONS				PART NO.		DESCRIPTION	PART DIMENSIONS				Screw Size				
Max. Tensile Strength		Max. Bundle Diameter		Natural	Black		A Length		B Width						
Lbs.	N	in.	mm.			in.	mm.	in.	mm.						
<b>Low Profile</b>															
65	289	5.91	150		<b>13294</b>	NTLP-65-097	19.68	500	.35	9,0					
<b>Releasable</b>															
40	178	1.38	35,0	<b>13297</b>	<b>13297B</b>	RNT-40-059	5.94	151	.14	3,5					
50	222	1.97	50,0	<b>13301</b>	<b>13301B</b>	RNT-50-079	7.95	202	.18	4,5					
100	444	2.87	73,0	<b>13302</b>	<b>13302B</b>	RNT-100-098	9.84	250	.30	7,5					
<b>Screw Mount</b>															
18	80	.87	22,0	<b>13307</b>	-	MNT-18-044	4.41	112	.10	2,5	#4 screw				
30	133	1.00	25,4	<b>3550</b>	-	MNT 90	5.50	140	.12	2,9					
40	178	1.25	31,8	<b>3555</b>	-	MNT 120	6.50	165	.14	3,6	#8 screw				
		1.38	35,0	<b>13308</b>	-	MNT-40-067	6.69	170							
50	222	1.75	44,4	<b>3560</b>	-	MNT 150	8.00	203	.19	4,8	#10 screw				
		1.97	50,0	<b>13309</b>	-	MNT-50-086	8.66	220	.17	4,3					
<b>Identification</b>															
18	80	.87	22,0	<b>13316</b>	-	NTID-18-039	3.94	100	.10	2,5	.31	8,0	1.00	25,4	


Standard color natural. Consult Heyco for UV Black (at extra charge).

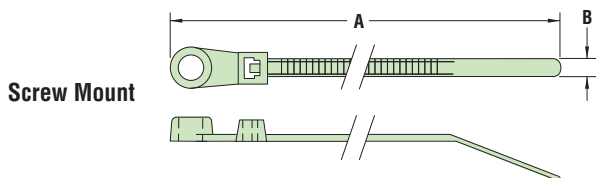


Style 1




Style 2




Style 3




Style 4



13294



RNT Series



13316

Material	Nylon 6/6
Certifications	Recognized under Underwriters' Laboratories' File E54523 (Screw Mount Nytyes only)
Flammability Rating	94V-2
Temperature Range	32°F (0°C) to 185°F (85°C)