

“Stay Connected” with



HEYware Products


a PennEngineering® Company

HEYClip™ Cable Holders - Blind Head Mount

For .250" (6,4 mm) *Minimum* Thickness Panels

WIRE CAPACITY		PART NO.	DESCRIPTION	OVERALL HEIGHT C		FOOTPRINT A x B		MOUNTING HOLE DIA.	
in.	mm.			in.	mm.	in.	mm.	in.	mm.
Top Entry - Regular Gate									
.44	x .19	4202	CH RB-13	.51	13,0	.22 x .61	5,6 x 15,5	.312	7,9
	x 4,8								
	x .38								
	x 9,7								
	x .74	4204	CH RB-27	1.06	26,9				
	x 18,8								
	x 1.05	4205	CH RB-35	1.40	35,6				
	x 26,7								
Top Entry - Latch Gate									
.44	x .14	4206	CH LB-13	.51	13,0	.22 x .61	5,6 x 15,5	.312	7,9
	x 3,6								
	x .33								
	x 8,4								
	x .69	4208	CH LB-27	1.06	27,0				
	x 17,5								
	x 1.00	4209	CH LB-35	1.38	35,0				
	x 25,4								
Side Entry - Regular Gate*									
.11	x .33	4220	CH RB-13-90	.20	5,1	.37 x .50	9,5 x 12,7	.157	4,0
	x 8,3								
	x .49	4221	CH RB-17-90	.20	5,1	.37 x .67	9,5 x 17,0		
	x 12,5								

Standard color natural. Flame retardant UL 94V-0 material available, consult Heyco. *For Panel thickness up to .161" (4,1 mm)

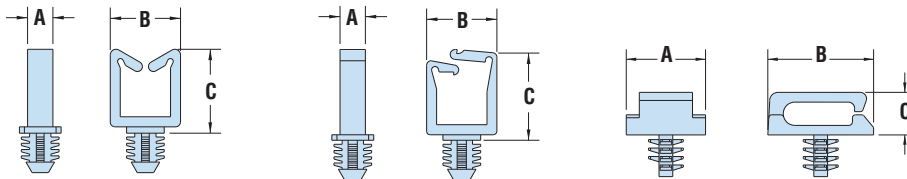

Top Entry Regular Gate

Top Entry Latch Gate

Side Entry Regular Gate

HEYClip™ Cable Holders - Adhesive Back Mount

WIRE CAPACITY		PART NO.			DESCRIPTION	OVERALL HEIGHT C		FOOTPRINT A x B		STYLE
in.	mm.	Rubber	Acrylic	VHB		in.	mm.	in.	mm.	
CH RA Series										
.17	x .12	4271	-	-	CH RA-72	.31	7,9	.37 x .37	9,5 x 9,5	4
	x 4,4									
.18	x .04	4212	-	-	CH RA-65	.26	6,5	.37 x .37	9,4 x 9,4	1
	x 1,0									
	x .11	4213	-	-	CH RA-83	.33	8,3			
	x 2,8									
	x .25	4214	4214A	4214V	CH RA-102	.40	10,2	.50 x .50	12,7 x 12,7	1
	x 6,4									
	x .31	4215	4215A	4215V	CH RA-119	.47	11,9			
	x 7,9									
	x .35	4216	4216A	4216V	CH RA-141	.56	14,1	.76 x .74	19,3 x 18,8	2
	x 6,1									
	x .31	4217	4217A	4217V	CH RA-157	.62	15,7			
	x 7,9									
	x .19	3603	3603A	3603V	CH RA-122	.47	12,0			
	x 4,7									
	x .45	3608	3608A	3608V	CH RA-172	.68	17,2			
	x 11,4									
	x .75	3613	3613A	3613V	CH RA-267	1.05	26,7			
	x 19,0									
	x .29	3614	-	-	CH RA-121	.48	12,1	.50 x 1.00	12,7 x 25,4	3
	x 7,4									

Standard color natural. Flame retardant UL 94V-0 material available, consult Heyco.

Material	Nylon 6/6	Adhesives*
Flammability Rating	94V-2	Rubber Adhesive 50°F (10°C) to 155°F (68°C)
Temperature Range	Nylon: 32°F (0°C) to 185°F (85°C)	Acrylic Adhesive 10°F (-12°C) to 180°F (82°C)
		VHB Adhesive -40°F (-40°C) to 194°F (90°C)

*Low temperature reflects minimum application temperature for adhesives



- Gather and route cables.
- Part Description Key: CH RB-X, where X = Overall Height (mm).



- Gather and direct single or bundles of cable.
- Apply to a clean, dry surface.
- Adhesive backing on part has tab for easy removal.
- Part Description Key: CH RA-X, where X = Overall Height (mm).
- Feature convenient peel away tab.
- Part Description Key: CH RA-X, where X = Overall Height (mm).
- Clips without suffix have a load rating of 1 pound per square inch
- Clips with suffix “A” have a load rating of 6 pounds per square inch
- Clips with suffix “V” have a load rating of 105 pounds per square inch

