




Heyco® Hose and Cable Wrap-Polyethylene Standard


- Easy to use: Just twist on wire!
- Allows breakouts of single/multiple wires and re-routing of replacement wires.
- Absorbs vibration, insulates cables and hose, and resists abrasion.
- Multiple sizes bundle and protect cables, wires, tubing, and hoses from .13" (3,2 mm) to 7.00" (177,8 mm) diameters.
- Conforms to: Fed Spec LP390, Mil I-631D, Mil P-21922B

- For hose and cable **clamps** see pages

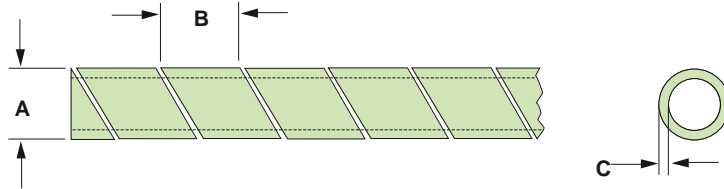

BUNDLE RANGE				PART NO.		DESCRIPTION	PART DIMENSIONS					
Minimum		Maximum		UV			A		B		C	
Diameter		Diameter		Black	Natural		Outside Diameter		Pitch		Thickness	
in.	mm.	in.	mm.			in.	mm.	in.	mm.	in.	mm.	
.062	1,6	.250	6,4	8900	8901	CW 125 PE	.125	3,2	.187	4,8	.032	0,8
.13	3,2	1.50	38,1	8904	8905	CW 187 PE*	.19	4,8	.25	6,3	.03	0,8
.19	4,8	2.00	50,8	8908	8909	CW 250 PE	.25	6,3	.38	9,5	.05	1,1
.31	7,9	3.00	76,2	8912	8913	CW 375 PE	.38	9,5	.44	11,1	.05	1,3
.38	9,5	4.00	101,6	8916	8917	CW 500 PE	.50	12,7	.50	12,7	.06	1,6
.50	12,7	4.50	114,3	8920	8921	CW 625 PE*	.63	15,9	.63	15,9	.06	1,6
		5.00	127,0	8924	8925	CW 750 PE	.75	19,1	.75	19,1	.07	1,7
1.00	25,4	7.00	177,8	8928	8929	CW 1000 PE	1.00	25,4	1.00	25,4	.08	2,0

Quick

Material	Polyethylene
Certifications	 Recognized under the Component Program of Underwriters' Laboratories File E173954.
Temperature Range	-76°F (-60°C) to 190°F (88°C) UL rated temp not to exceed 122°F (50°C)

Spec