


Quick Specs

Heyco® Copper Lug Connectors Copper Single Hole Offset Lugs

- 100% conductivity for highest efficiency.
- Completely reuseable.
- Require no special installation tools.
- UL listed and CSA certified for use with copper conductors.
- Marked with catalog description and conductor range.
- DFARS Compliant



WIRE RANGE (AWG)	PART NO.	DESCRIPTION	CURRENT RATING AMPS	HEIGHT WITH MAX. WIRE		PART DIMENSIONS					
						A		B		Bolt Size	
				in.	mm.	Tang Width		Length		in.	mm.
10-14	1850	CB 25	25	11/16	17.5	5/16	7.9	1	25.4	1/8	3.2
6-14	1851	CB 35	50	3/4	19.1	.38	9.7	1.38	35.1	3/16	4.8

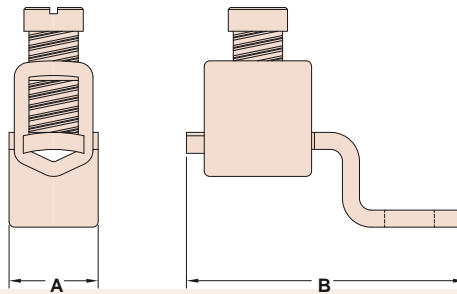

Materials
 Certifications

246619
 Flammability Rating

6061-T6 aluminum alloy; electrolytic copper
 Listed under Underwriters' Laboratories File E80121
 Certified by the Canadian Standards Association File 242954 &
 94V-0