




# Heyco® Wire Protector Terminal Blocks

## Screw to Screw—With Wire Protector Flap

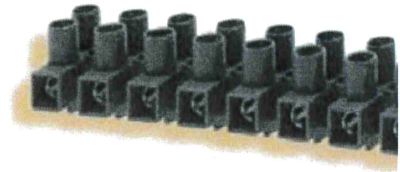


BODY STYLE	WIRE SIZE		AMPS North America	POLES	PART NO.		DESCRIPTION	Screws (Metric)	PART DIMENSIONS											
	AWG	mm <sup>2</sup>			Natural	FR Brown			(12) Poles											
									A	B	C	D	E	F	in.	mm.	in.	mm.	in.	mm.
Low Profile	12-22	2.5	20	2	9389	9419	TB 0B-WP-2P	M 2.6	3.69	93.6	.64	16.2	.61	15.4	.11	2.8	.32	8.0	.11	2.8
				3	9390	N/A	TB 0B-WP-3P													
				12	9393	N/A	TB 0B-WP-12P													
	10-20	4	30	2	9394	N/A	TB 1B-WP-2P	M 3.0	4.58	116.4	.73	18.6	.67	17.0	.14	3.6	.39	10.0	.14	3.6
				3	9395	N/A	TB 1B-WP-3P													
				4	N/A	9426	TB 1B-WP-4P													
Raised Base	8-14	6	50	2	9399	9429	TB 2B-WP-2P	M 3.5	5.26	133.5	.87	22.2	.82	20.8	.17	4.2	.45	11.5	.15	3.7
				3	9400	N/A	TB 2B-WP-3P													
				12	9403	9433	TB 2B-WP-12P													
	6-10	16	55	2	9404	N/A	TB 3B-WP-2P	M 4.0	6.89	175.0	.99	25.2	1.04	26.3	.23	5.8	.59	15.0	.20	5.1
				3	9405	N/A	TB 3B-WP-3P													
				12	9408	9438	TB 3B-WP-12P													

Standard color natural. Flame retardant brown available at extra charge.

\*Body Style indicates our standard offering/stocked product and the alternate body style is available for all configurations—consult Heyco.

- Wire protector flap allows the use of STRANDED or SOLID wire with no crimp terminals and no soldering required.
- Allows standardization of the SOLID WIRE Cordset. Input and output wires are always secured with a screw.
- Modern low profile design occupies less "real estate" inside the appliance.
- No exposed metal parts. "Dead front" designed safety.
- Pressure clamp connectors are supplied in the open position, ready to accept single or multiple solid conductors.
- All sizes are rated at 300 volts (450 volts in Europe).
- Metal parts feature galvanized steel screws and Ni or tin plated brass inserts.
- Available in 94V-0 flame retardant (FR), glass-filled 6/6 Nylon material.
- Material Temperature Index: 284°F (140°C), except TB 3P—338°F (170°C).
- Part No. 9299 fixing pin can be used to mount all terminal blocks, with panel thickness limitations—consult Heyco.

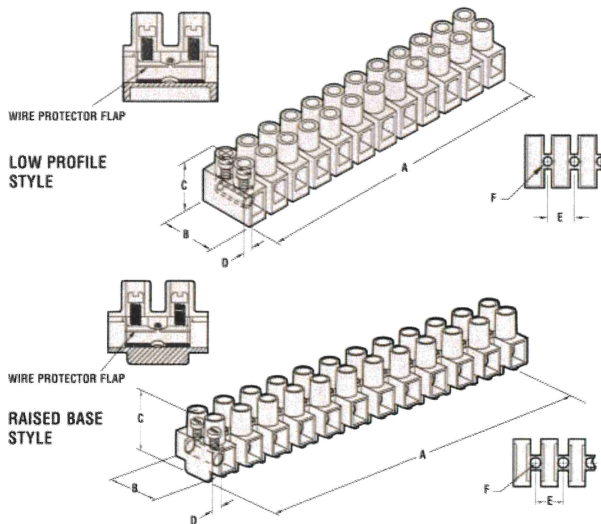

Material: 6/6 Nylon and brass  
 Flamability Rating: 94V-2  
 Certifications: Recognized under the Component Program of Underwriters' Laboratories File E197025  
 Certified by the Canadian Standards Association File LR210961  
 Approved

*Quick Spec*