
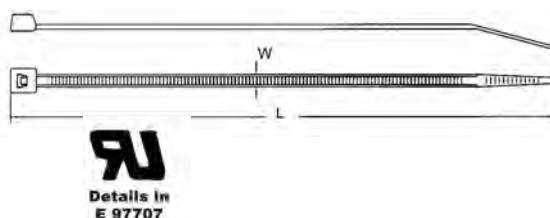


# WIRE HANDLING HARDWARE

## SECTION VII



- Manufactured from tough, durable Nylon 6/6 material which is self extinguishing to U.L. 94V2.
- The Nylon is inert to fungus or mold and is resistant to petrols, oil, grease and alkalis, etc.
- Ties can be tensioned by hand or by the use of applied tensioning tools.
- TENSILE STRENGTH AT 73° DRY AS MOLDED
- Packaged 100 pieces per bag.

Additional **COLORS** are available for part numbers beginning with **NT**: **Red, Yellow, Green and Blue**.  
Add the color to the end of the part number when ordering. Example: ( NT10025C**RED** ) ( NT10025C**GREEN** )

Additional **COLORS** are available for part numbers beginning with **23CT**: **Red-(RD), Yellow-(Y) Green-(GR) and Blue-(BL)**.  
Add the color code to the end of the part number when ordering. Example: ( 23CT060050**RD** ) ( 23CY060050**Y** )

## CABLE TIES

Molded in **Natural and Black Nylon 6/6**

<b>Natural</b> ITEM NUMBER	<b>Black UV</b> ITEM NUMBER	LENGTH		WIDTH		MAX. DIAMETER		TENSILE STRENGTH		RANGE
NT08025C	NT08025CB	2.95"	75mm	.094"	2.4mm	.71"	18mm	18lb	8.1kg	MINIATURE
NT10025C	NT10025CB	3.94"	100mm	.098"	2.5mm	.98"	25mm	18lb	8.1kg	MINIATURE
NT16025C	NT16025CB	6.50"	165mm	.098"	2.5mm	1.73"	44mm	18lb	8.1kg	MINIATURE
NT20025C	NT20025CB	7.99"	203mm	.098"	2.5mm	2.16"	55mm	18lb	8.1kg	MINIATURE
NTA12032C	NTA12032CB	4.75"	120mm	.126"	3.2mm	1.18"	30mm	40lb	18kg	INTERMEDIATE
NT14036C	NT14036CB	5.59"	142mm	.126"	3.2mm	1.38"	35mm	40lb	18kg	INTERMEDIATE
NT20036C	NT20036CB	7.99"	203mm	.126"	3.2mm	2.16"	55mm	40lb	18kg	INTERMEDIATE
NT29536C	NT29536CB	11.50"	292mm	.142"	3.6mm	3.35"	85mm	40lb	18kg	INTERMEDIATE
NTA12048C	NTA12048CB	4.72"	120mm	.189"	4.8mm	1.18"	30mm	50lb	22kg	STANDARD
23CT060050 <sup>●</sup>	23CT060050B <sup>●</sup>	6.00"	152mm	.183"	4.6mm	1.31"	33mm	50lb	22kg	STANDARD
NT16048C	NT16048CB	6.30"	160mm	.189"	4.8mm	1.65"	42mm	50lb	22kg	STANDARD
NT18048C	NT18048CB	7.48"	190mm	.189"	4.8mm	2.05"	52mm	50lb	22kg	STANDARD
23CT080050	23CT080050B	8.00"	203mm	.181"	4.6mm	2.05"	52mm	50lb	22kg	STANDARD
NT20048C <sup>●</sup>	NT20048CB <sup>●</sup>	7.99"	203mm	.181"	4.6mm	2.16"	55mm	50lb	22kg	STANDARD
NT25048C	NT25048CB	9.84"	250mm	.189"	4.8mm	2.91"	74mm	50lb	22kg	STANDARD
NT29548C	NT29548CB	11.02"	280mm	.189"	4.8mm	3.19"	81mm	50lb	22kg	STANDARD
NT37048C	NT37048CB	14.49"	368mm	.189"	4.8mm	4.02"	102mm	50lb	22kg	STANDARD
23CT110120 <sup>●</sup>	23CT110120B <sup>●</sup>	11.00"	279mm	.292"	7.4mm	2.79"	70mm	120lb	54.5kg	STANDARD
NTA43248C	NTA43248CB	17.00"	432mm	.189"	4.8mm	4.92"	125mm	50lb	22kg	STANDARD
NT15076C <sup>●</sup>	NT15076CB <sup>●</sup>	5.91"	150mm	.299"	7.6mm	1.54"	39mm	120lb	54.5kg	LIGHT HEAVY
NT20076C	NT20076CB	7.99"	203mm	.299"	7.6mm	2.16"	55mm	120lb	54.5kg	LIGHT HEAVY
NT29076C	NT29076CB	11.02"	280mm	.299"	7.6mm	3.07"	78mm	120lb	54.5kg	LIGHT HEAVY
23CT145050 <sup>●</sup>	23CT145050B <sup>●</sup>	14.50"	368mm	.181"	4.5mm	4.02"	102mm	50lb	22kg	LIGHT HEAVY
NT37076C	NT37076CB	14.96"	380mm	.299"	7.6mm	4.33"	110mm	120lb	54.5kg	LIGHT HEAVY
NT45090C	NT45090CB	17.72"	450mm	.315"	8.0mm	5.24"	133mm	175lb	80kg	HEAVY
NT55090C	NT55090CB	21.65"	550mm	.315"	8.0mm	6.54"	166mm	175lb	80kg	HEAVY
NTA61090C	NTA61090CB	24.00"	610mm	.354"	9.0mm	7.28"	185mm	175lb	80kg	HEAVY
NT76290C	NT76290CB	30.00"	762mm	.354"	9.0mm	9.29"	236mm	175lb	80kg	HEAVY
NTA91490C	NTA91490CB	36.00"	914mm	.354"	9.0mm	10.63"	270mm	175lb	80kg	HEAVY
NTA121990C	NTA121990CB	48.00"	1219mm	.354"	9.0mm	14.96"	380mm	175lb	80kg	HEAVY

<sup>●</sup> NOT U.L. RECOGNIZED