




## Heyco® Feet of Strength Feet with Push Rivet

PART DIMENSIONS						PANEL DIMENSIONS				PART NO. Black	DESCRIPTION				
A Overall Height	B Top Diameter		C Bottom Diameter		Mounting Hole Diameter	Thickness Range									
in. mm.	in. mm.	in. mm.	in. mm.	in. mm.		in. mm.	Minimum	Maximum							
						in.	mm.	in.	mm.						
<b>FSR Series</b>															
.16	4,0	.43	10,8	.39	10,0	.142	3,6	.02	0,5	.05	1,2	<b>2519</b>	FSR 16-14-05		
								.05	1,2	.08	2,0	<b>2520</b>	FSR 16-14-08		
								.06	1,5	.10	2,5	<b>2521</b>	FSR 16-14-10		
								.10	2,5	.14	3,5	<b>2550</b>	FSR 16-14-14		
.17	4,2	.83	21,0	.79	20,0	.165	4,2	.03	0,8	.07	1,8	<b>2522</b>	FSR 17-17-07		
								.07	1,8	.11	2,8	<b>2523</b>	FSR 17-17-11		
								.11	2,9	.15	3,7	<b>2524</b>	FSR 17-17-15		
								.15	3,8	.19	4,8	<b>2525</b>	FSR 17-17-19		
.22	5,5	.56	14,2	.53	13,5	.122	3,1	.03	0,8	.07	1,8	<b>2517</b>	FSR 22-12-07		
								.07	1,8	.11	2,8	<b>2518</b>	FSR 22-12-11		
.24	6,0	.59	15,0	.55	14,0	.165	4,2	.02	0,6	.04	1,0	<b>2500</b>	FSR 24-17-04		
										.04	1,0	.08	2,0	<b>2501</b>	FSR 24-17-08
										.08	2,0	.12	3,1	<b>2502</b>	FSR 24-17-12
						.204	5,2	.03	0,8	.05	1,2	<b>2506</b>	FSR 24-21-05		
										.05	1,3	.09	2,3	<b>2507</b>	FSR 24-21-09
.24	6,0	.83	21,0	.79	20,0					.03	0,8	.07	1,8	<b>2526</b>	FSR 241-17-07
								.08	1,9	.11	2,8	<b>2527</b>	FSR 241-17-11		
								.11	2,9	.16	4,0	<b>2528</b>	FSR 241-17-16		
.31	8,0	.83	21,0	.79	20,0	.165	4,2	.01	0,3	.03	0,8	<b>2575</b>	FSR 31-17-03		
								.03	0,8	.08	2,0	<b>2529</b>	FSR 31-17-08		
								.08	2,1	.12	3,1	<b>2530</b>	FSR 31-17-12		
.35	9,0	.59	15,0	.55	14,0	.165	4,2	.04	1,0	.08	2,0	<b>2532</b>	FSR 35-17-08		
								.08	2,0	.12	3,1	<b>2533</b>	FSR 35-17-12		

Standard color black.

- Require only fingertip pressure for fast, easy installation.
- May be released from inside the panel.
- Multiple sizes range in height from .16" (4,0 mm) to .35" (9,0 mm).
- Part Description Key:  
FSR XX-YY-ZZ where XX = Overall Height (inches), YY = Mounting Hole Diameter (inches) and ZZ = Maximum Panel Thickness (inches)

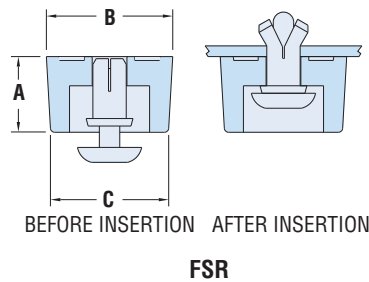

Material: Thermoplastic Rubber (TPR)  
 Flammability Rating: 94-HB  
 Temperature Range: -30°F (-34°C) to 250°F (121°C)

*Quick  
Specs*