

PRESS-LOC THUMB SCREW KNOBS

SECTION
I

STANDARD - ROUND HEAD - KNOB

PRESSES ONTO ANY STD. SOCKET HEX CAP SCREW


ITEM NUMBER	Material: ACETAL		SPECIFICATIONS	
	SCREW SIZE	OD	HEIGHT	
29R004	#4	5/16"	11/64"	
29R006	#6	3/8"	13/64"	
29R008	#8	1/2"	7/32"	
29R010	#10	21/32"	1/4"	
29R147	1/4	3/4"	5/16"	
29R141	1/4	1"	21/64"	
29R516	5/16	1"	25/64"	

METRIC - ROUND HEAD - KNOB


PRESSES ONTO ANY STD. SOCKET HEX CAP SCREW.

ITEM NUMBER	Material: ACETAL		SPECIFICATIONS	
	SCREW SIZE	OD	HEIGHT	
29M300R	M 3	9,53	5,16	
29M400R	M 4	12,70	5,56	
29M500R	M 5	16,60	6,35	
29M600R	M 6	19,05	7,93	
29M601R	M 6	25,40	8,33	
29M801R	M 8	25,40	9,92	

#8 and #10 screws are fully threaded up to and including 1" long
1/4-20" screws are fully threaded up to and including 1 1/4" long
5/16" and 3/8" screws are fully threaded up to and including 1 1/2" long

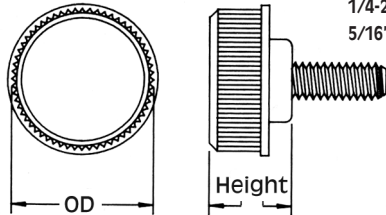

ROUND HEAD DRAWING FOR:
STANDARD HEAD DIA.
5/16" THROUGH 1"

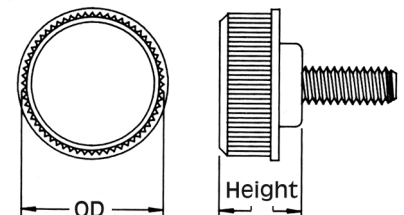

ROUND HEAD DRAWING FOR:
METRIC HEAD DIA.
9,53 THROUGH 25,40

NOTE: PRESS LOC THUMB SCREWS ARE DESIGNED TO BE HAND TIGHTENED.

STANDARD - ROUND HEAD - SCREW

NYLON 6

MOLDED ONTO ZINC PLATED STEEL ALLOY SOCKET HEAD CAP SCREW.

ITEM NUMBER	THREAD	SCREW SIZE	LENGTH	OD
29R004S025	4-40	4	1/4"	5/16"
29R004S037	4-40	4	3/8"	5/16"
29R004S050	4-40	4	1/2"	5/16"
29R004S075	4-40	4	3/4"	5/16"
29R006S025	6-32	6	1/4"	3/8"
29R006S037	6-32	6	3/8"	3/8"
29R006S050	6-32	6	1/2"	3/8"
29R006S062	6-32	6	5/8"	3/8"
29R006S075	6-32	6	3/4"	3/8"
29R008S025	8-32	8	1/4"	1/2"
29R008S037	8-32	8	3/8"	1/2"
29R008S050	8-32	8	1/2"	1/2"
29R008S075	8-32	8	3/4"	1/2"
29R008S100	8-32	8	1"	1/2"
29R010S037	10-32	10	3/8"	21/32"
29R010S050	10-32	10	1/2"	21/32"
29R010S075	10-32	10	3/4"	21/32"
29R010S100	10-32	10	1"	21/32"
29R010S150	10-32	10	1-1/2"	21/32"
29R147S050	1/4-20	1/4	1/2"	3/4"
29R147S075	1/4-20	1/4	3/4"	3/4"
29R147S100	1/4-20	1/4	1"	3/4"
29R147S125	1/4-20	1/4	1-1/4"	3/4"
29R147S150	1/4-20	1/4	1-1/2"	3/4"
29R141S050	1/4-20	1/4	1/2"	1"
29R141S075	1/4-20	1/4	3/4"	1"
29R141S100	1/4-20	1/4	1"	1"
29R141S125	1/4-20	1/4	1-1/4"	1"
29R141S150	1/4-20	1/4	1-1/2"	1"
29R516S050	5/16-18	5/16	1/2"	1"
29R516S075	5/16-18	5/16	3/4"	1"
29R516S100	5/16-18	5/16	1"	1"
29R516S150	5/16-18	5/16	1-1/2"	1"

METRIC - ROUND HEAD - SCREW

NYLON 6

MOLDED ONTO ZINC PLATED STEEL ALLOY SOCKET HEAD CAP SCREW.

ITEM NUMBER	SCREW SIZE	LENGTH	OD
29M30050R008	M 3	M 8	9,53
29M30050R010	M 3	M 10	9,53
29M30050R012	M 3	M 12	9,53
29M30050R016	M 3	M 16	9,53
29M40070R010	M 4	M 10	12,70
29M40070R012	M 4	M 12	12,70
29M40070R016	M 4	M 16	12,70
29M40070R020	M 4	M 20	12,70
29M40070R025	M 4	M 25	12,70
29M50080R012	M 5	M 12	16,60
29M50080R016	M 5	M 16	16,60
29M50080R020	M 5	M 20	16,60
29M50080R025	M 5	M 25	16,60
29M50080R040	M 5	M 40	16,60
29M60100R012	M 6	M 12	19,05
29M60100R016	M 6	M 16	19,05
29M60100R020	M 6	M 20	19,05
29M60100R025	M 6	M 25	19,05
29M60100R040	M 6	M 40	19,05
29M61100R012	M 6	M 12	25,40
29M61100R016	M 6	M 16	25,40
29M61100R020	M 6	M 20	25,40
29M61100R025	M 6	M 25	25,40
29M61100R040	M 6	M 40	25,40
29M80125R012	M 8	M 12	25,40
29M80125R016	M 8	M 16	25,40
29M80125R020	M 8	M 20	25,40
29M80125R025	M 8	M 25	25,40
* 29M80125R040	M 8	M 40	25,40

* NOT FULLY THREADED

