


## Heyco® Nylon PCB Supports - Imperial Spacing

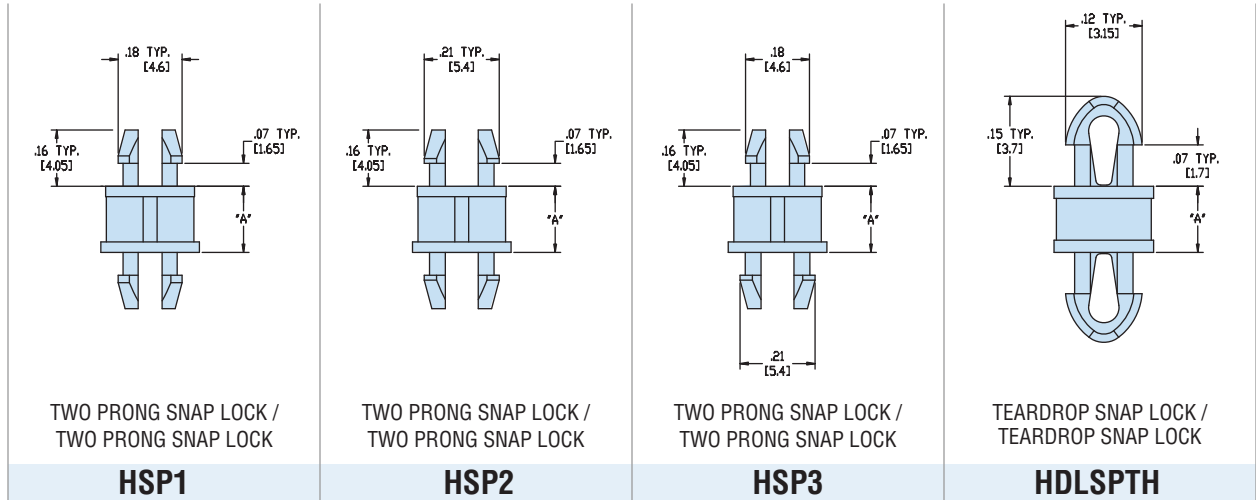

	Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
<b>PCB</b>	.062	1,6	.157	4,0	.062	1,6	.187	4,8	.062	1,6	.157	4,0	.062	1,6	.098	2,5
<b>Chassis</b>	.062	1,6	.157	4,0	.062	1,6	.187	4,8	.062	1,6	.187	4,8	.062	1,6	.098	2,5

A		PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION	
in.	mm.									
.063	1,6								<b>10036</b>	HDLSPTH-01
.125	3,2								<b>10037</b>	HDLSPTH-02
.187	4,8	<b>10000</b>	HSP1-03	<b>10012</b>	HSP2-03	<b>10024</b>	HSP3-03	<b>10038</b>	HDLSPTH-03	
.250	6,4	<b>10001</b>	HSP1-04	<b>10013</b>	HSP2-04	<b>10025</b>	HSP3-04	<b>10039</b>	HDLSPTH-04	
.312	7,9	<b>10002</b>	HSP1-05	<b>10014</b>	HSP2-05	<b>10026</b>	HSP3-05	<b>10040</b>	HDLSPTH-05	
.375	9,5	<b>10003</b>	HSP1-06	<b>10015</b>	HSP2-06	<b>10027</b>	HSP3-06	<b>10041</b>	HDLSPTH-06	
.437	11,1	<b>10004</b>	HSP1-07	<b>10016</b>	HSP2-07	<b>10028</b>	HSP3-07	<b>10042</b>	HDLSPTH-07	
.500	12,7	<b>10005</b>	HSP1-08	<b>10017</b>	HSP2-08	<b>10029</b>	HSP3-08	<b>10043</b>	HDLSPTH-08	
.562	14,3	<b>10006</b>	HSP1-09	<b>10018</b>	HSP2-09	<b>10030</b>	HSP3-09	<b>10044</b>	HDLSPTH-09	
.625	15,9	<b>10007</b>	HSP1-10	<b>10019</b>	HSP2-10	<b>10031</b>	HSP3-10	<b>10045</b>	HDLSPTH-10	
.750	19,1	<b>10008</b>	HSP1-12	<b>10020</b>	HSP2-12	<b>10032</b>	HSP3-12			
.875	22,2	<b>10009</b>	HSP1-14	<b>10021</b>	HSP2-14	<b>10033</b>	HSP3-14	<b>10046</b>	HDLSPTH-14	
1.000	25,4	<b>10010</b>	HSP1-16	<b>10022</b>	HSP2-16	<b>10034</b>	HSP3-16			

Standard color natural. For special order parts in UL 94V-0 natural material, add the suffix “F” to Part No.

*Quick  
Specs*

Material Nylon 6/6  
 Flammability Rating 94V-2  
 Temperature Range -40°F (-40°C) to 185°F (85°C)