


PANEL FASTENERS AND HOLE PLUGS

SECTION VI

Nylon Locking Hole Plugs are available in a large selection of sizes from 3/16" to 4". Designed with multiple locks to positively snap in panel thicknesses ranging from 1/64" to 1/4". Locking Hole Plugs are used to close excess chassis holes, wiring outlets, and production access holes.


- MOLDED OF HEAT STABILIZED NYLON (UL94V2) BLACK
- SUITABLE FOR CRITICAL OR ELEVATED TEMPERATURE APPLICATIONS.
- WHITE PARTS ADD "W" TO THE END OF PART NUMBER.

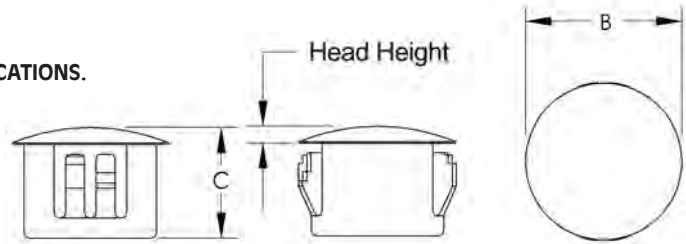

LOCKING HOLE PLUGS

Molded in **Black Heat Stabilized Nylon (UL94V2)**

ITEM NUMBER	HOLE DIAMETER	MAXIMUM THICKNESS	HEAD DIA. B	THICKNESS C	HEAD HEIGHT
* 62MP0187	.187 (4,8)	.062 (1,6)	.250 (6,4)	.234 (5,9)	.062 (1,57)
* 62MP0250	.250 (6,4)	.062 (1,6)	.312 (8,0)	.312 (8,0)	.062 (1,57)
* 62MP0312	.312 (8,0)	.062 (1,6)	.375 (9,5)	.312 (8,0)	.062 (1,57)
* 62MP0375	.375 (9,5)	.125 (3,2)	.468 (12,0)	.406 (10,3)	.062 (1,57)
* 62MP0437	.437 (11,0)	.125 (3,2)	.531 (13,5)	.406 (10,3)	.062 (1,57)
* 62MP0500	.500 (12,7)	.125 (3,2)	.578 (14,6)	.406 (10,3)	.062 (1,57)
* 62MP0562	.562 (14,3)	.125 (3,2)	.656 (16,7)	.406 (10,3)	.062 (1,57)
* 62MP0625	.625 (15,9)	.125 (3,2)	.718 (18,2)	.406 (10,3)	.062 (1,57)
* 62MP0687	.687 (17,5)	.125 (3,2)	.781 (20,0)	.406 (10,3)	.062 (1,57)
* 62MP0750	.750 (19,0)	.125 (3,2)	.922 (23,2)	.406 (10,3)	.062 (1,57)
* 62MP0812	.812 (20,6)	.125 (3,2)	.890 (22,6)	.406 (10,3)	.062 (1,57)
* 62MP0875	.875 (22,2)	.125 (3,2)	1.016 (25,8)	.453 (11,5)	.062 (1,57)
** 62MP1000	1.000 (25,5)	.125 (3,2)	1.203 (30,5)	.453 (11,5)	.062 (1,57)
** 62MP1093	1.093 (27,8)	.125 (3,2)	1.222 (31,0)	.453 (11,5)	.062 (1,57)
** 62MP1187	1.187 (30,1)	.125 (3,2)	1.315 (33,4)	.453 (11,5)	.062 (1,57)
** 62MP1250	1.250 (32,0)	.125 (3,2)	1.375 (34,9)	.453 (11,5)	.062 (1,57)
** 62MP1250A	1.250 (32,0)	.125 (3,2)	1.500 (38,0)	.453 (11,5)	.062 (1,57)
** 62MP1375	1.375 (35,0)	.125 (3,2)	1.500 (38,0)	.453 (11,5)	.062 (1,57)
*** 62MP1500	1.500 (38,0)	.125 (3,2)	1.672 (42,7)	.453 (11,5)	.062 (1,57)
*** 62MP1750	1.750 (45,0)	.125 (3,2)	1.935 (49,1)	.453 (11,5)	.062 (1,57)
*** 62MP2000	2.000 (51,0)	.125 (3,2)	2.140 (55,0)	.453 (11,5)	.062 (1,57)
**** 62MP2250	2.250 (57,1)	.250 (6,3)	2.422 (61,5)	.750 (19,0)	.092 (2,33)
**** 62MP2500	2.500 (63,5)	.250 (6,3)	2.775 (70,5)	.750 (19,0)	.062 (1,57)
**** 62MP3000	3.000 (76,2)	.250 (6,3)	3.171 (80,5)	.720 (18,2)	.065 (1,65)
**** 62MP3375	3.375 (85,7)	.250 (6,3)	3.656 (92,8)	.725 (18,4)	.070 (1,77)
**** 62MP3500	3.500 (88,9)	.250 (6,3)	3.660 (92,9)	.750 (19,0)	.093 (2,36)
**** 62MP4000	4.000 (101,6)	.250 (6,3)	4.156 (105,5)	.765 (19,4)	.125 (3,17)




*MINIMUM ORDER QUANTITY 1,000 PCS **MINIMUM ORDER QUANTITY 500 PCS
 MINIMUM ORDER QUANTITY 250 PCS *MINIMUM ORDER QUANTITY 100 PCS

LOCKING VENT PLUGS

Molded in **Black Heat Stabilized Nylon (UL94V2)**

LOCKING VENT PLUGS ARE AVAILABLE
 3/4" to 7/8" AND 1" DIAMETERS.

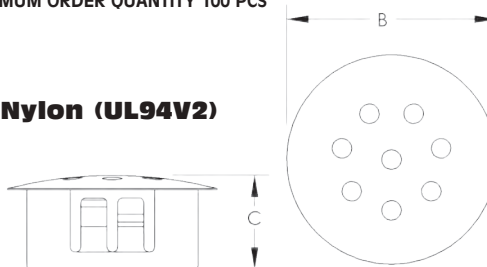

ITEM NUMBER	HOLE DIAMETER	MAXIMUM THICKNESS	HEAD DIAMETER B	THICKNESS C
* 62MP0750V	.750 (19,1)	.125 (3,2)	.906 (23,0)	.406 (10,3)
* 62MP0875V	.875 (22,5)	.125 (3,2)	1.016 (25,8)	.453 (11,5)
** 62MP1000V	1.000 (25,5)	.125 (3,2)	1.215 (30,8)	.453 (11,5)

