

“Stay Connected” with



Solar Power Components

a PennEngineering® Company



- Easy to use: Just twist on wire!
- Allows breakouts of single/multiple wires and re-routing of replacement wires.
- Absorbs vibration, insulates cables and hose, and resists abrasion.
- Multiple sizes bundle and protect cables, wires, tubing, and hoses from .13” (3,2 mm) to 7.00” (177,8 mm) diameters.
- Conforms to: Fed Spec LP390, Mil I-631D, Mil P-21922B
- For hose and cable **clamps** see pages 7-36 through 7-43 in Heyco Catalog 117.


Heyco® Hose and Cable Wrap-Polyethylene

Standard

BUNDLE RANGE				PART NO.		DESCRIPTION	PART DIMENSIONS					
Minimum Diameter		Maximum Diameter		UV Black	Natural		A Outside Diameter		B Pitch		C Thickness	
in.	mm.	in.	mm.			in.	mm.	in.	mm.	in.	mm.	
.13	3,2	1.50	38,1	8904	8905	CW 187 PE*	.19	4,8	.25	6,3	.03	0,8
.19	4,8	2.00	50,8	8908	8909	CW 250 PE	.25	6,3	.38	9,5	.05	1,1
.31	7,9	3.00	76,2	8912	8913	CW 375 PE	.38	9,5	.44	11,1	.05	1,3
.38	9,5	4.00	101,6	8916	8917	CW 500 PE	.50	12,7	.50	12,7	.06	1,6
.50	12,7	4.50	114,3	8920	8921	CW 625 PE*	.63	15,9	.63	15,9	.06	1,6
		5.00	127,0	8924	8925	CW 750 PE	.75	19,1	.75	19,1	.07	1,7
1.00	25,4	7.00	177,8	8928	8929	CW 1000 PE	1.00	25,4	1.00	25,4	.08	2,0

Standard colors UV black or natural.

* Parts are not UR recognized.

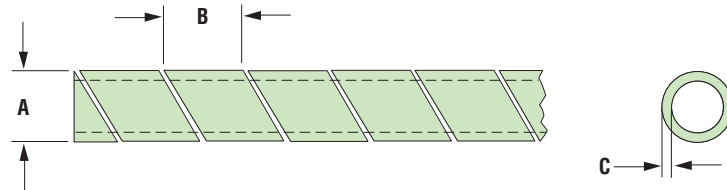

Quick
Specs

Material
Certifications

Polyethylene



Recognized under the Component Program of Underwriters' Laboratories File E173954.

Temperature Range

-76°F (-60°C) to 190°F (88°C) UL rated temp not to exceed 122°F (50°C)